

# DESCRIPTION OF URET ENHANCEMENTS TO SUPPORT SEVERE WEATHER AVOIDANCE

Winfield S. Heagy\* and Daniel B. Kirk<sup>†</sup>

The MITRE Corporation  
Center for Advanced Aviation System Development (CAASD)  
McLean, Virginia 22102

## ABSTRACT

The MITRE Corporation's Center for Advanced Aviation System Development (CAASD) and the Federal Aviation Administration (FAA) are currently developing a set of enhancements to the User Request Evaluation Tool (URET). These enhancements are designed to further the support provided by URET for strategic Air Traffic Control, by extending the URET analysis and detection capabilities to new types of problems (e.g., severe weather), and assisting in the resolution of these problems. This paper describes extensions of the URET capabilities to support severe weather avoidance, as currently implemented in the CAASD En Route Research Prototype. The Concept of Use for these enhancements is presented, along with the methodology and results of initial laboratory evaluations and a pilot survey. Topics for future evaluations and analysis are also identified.

## INTRODUCTION

To meet user demands and to accommodate growth in traffic, the Federal Aviation Administration (FAA) and National Airspace System (NAS) users have embarked on an initiative known as Free Flight. Free Flight provides users with as much flexibility of flight as possible, while maintaining or increasing NAS safety and predictability. To implement Free Flight, the FAA has been developing and refining concepts, defining architectures, and developing the decision support capabilities needed to support the Free Flight concepts. The FAA, assisted by The MITRE Corporation's Center for Advanced Aviation System Development (CAASD), has also been working with industry representatives to develop the NAS Operational

Evolution Plan (OEP)<sup>1</sup> that further integrates and aligns the FAA's objectives and plans with those of the aviation industry.

The FAA is implementing Free Flight with an incremental development strategy. In the first step (Free Flight Phase 1, or FFP1), a set of existing core capabilities was deployed to a limited number of sites. One of these capabilities is the User Request Evaluation Tool (URET), which provides the en route Sector Team with automated conflict detection and trial planning capabilities, and a set of tools to assist in the management of flight data. A prototype version of URET was developed by CAASD and deployed to the Indianapolis Air Route Traffic Control Center (ARTCC) in 1996 and to the Memphis ARTCC in 1997. This prototype was used for over 1.4 million sector-hours to develop and validate requirements for the production version of URET, which was installed at those sites in January 2002. URET has now been deployed to six ARTCCs as part of FFP1, and deployment to the remaining 14 ARTCCs is ongoing as part of Free Flight Phase 2 (FFP2).

Evidence from the ongoing usage of URET is that it supports a shift away from tactical operations based on radar data towards strategic Air Traffic Control (ATC) planning based on flight plans and associated trajectories. The benefits provided by this shift include less frequent and/or less severe maneuvers to resolve conflicts, more time for negotiation between controllers and pilots to develop clearances that meet the objectives of both, accommodation of pilot requests and user-preferred routing resulting in the reduction of delays and user operating costs, and the relaxation of

---

\*Lead Engineer; <sup>†</sup>Principal Engineer, Member AIAA

Copyright © 2003 by The MITRE Corporation. This work was produced for the U.S. Government under Contract DTFA01-01-C-00001 and is subject to Federal Aviation Administration Acquisition Management System Clause 3.5-13, Rights In Data-General, Alt. III and Alt. IV (Oct., 1996). The contents of this document reflect the views of the author and The MITRE Corporation and do not necessarily reflect the views of the Federal Aviation Administration (FAA) or the Department of Transportation (DOT). Neither the FAA nor the DOT makes any warranty or guarantee, expressed or implied, concerning the content or accuracy of these views.

some of the altitude and speed restrictions currently in place.<sup>2,3</sup>

The following Free Flight enhancements are expected to provide further support for a shift toward strategic ATC planning, as reflected by FAA and industry consensus:<sup>4-7</sup>

- The addition of tools to the FFP1 baseline to further assist the controller in the development of strategic resolutions for Aircraft-to-Aircraft and Aircraft-to-Special Use Airspace (SUA) conflicts, for problems with severe weather, and for implementing Traffic Flow Management (TFM) Initiatives.
- The integration of these resolution tools at the sector position to allow each controller access to the full range of tactical and strategic information.

This set of problem resolution support capabilities is termed Problem Analysis, Resolution and Ranking (PARR). As with URET, the initial development of the PARR capabilities was conducted by CAASD and the FAA as part of the AERA (Automated En Route ATC) program<sup>8-10</sup> in the late 1980s and early 1990s. PARR is being designed as a series of incremental enhancements to URET, and has been designated as priority research for FFP2. The first PARR enhancement provides support for the quick assessment of alternatives such as direct routings, altitudes and speeds using the existing URET conflict probe functionality and displays.<sup>11-12</sup>

A subsequent step in PARR expands the problem detection, notification, and analysis/resolution capabilities to include support for situations involving severe weather.<sup>13</sup> The URET problem detection and notification capabilities are enhanced to indicate where controller attention may need to be focused to assist with severe weather avoidance. Analysis and resolution support for these problems is provided by enhanced URET displays, trial planning and resolution capabilities.

This paper provides a description of the severe weather enhancements as currently implemented in the CAASD En Route Research Prototype, which contains the full set of URET prototype and PARR capabilities. The Concept of Use for these enhancements is presented, along with the methodology and results of initial laboratory evaluations and a pilot survey. Topics for future evaluations and analysis are also identified.

Because PARR is a URET enhancement and utilizes many of the URET capabilities, an overview of URET is provided in the following subsection. Further details on URET may be found in Ref. 14.

## URET Overview

URET processes real-time flight plan and aircraft track data from the NAS Host computer. These data are combined with site adaptation, key aircraft performance parameters, and winds and temperatures from the National Weather Service (NWS) in order to build four-dimensional flight profiles, or trajectories. URET uses these trajectories to continuously detect potential aircraft separation violations for Instrument Flight Rules (IFR) flights up to twenty minutes into the future, and to notify the appropriate sector.

In addition to their application of modeling the currently planned actions of aircraft, trajectories are the basis for URET's trial planning capability. Trial planning allows the controller to check a desired flight plan amendment for potential conflicts before a clearance is issued.

The URET capabilities include a controller interface for both textual and graphic information. The text-based Plans Display and Aircraft List manage the presentation of flight data (call-sign, route, altitude, etc.), Trial Plans, and conflict information for the sector. The Graphic Plan Display (GPD) provides a graphical capability to view aircraft routes and altitudes, predicted conflicts, and Trial Plan resolutions, which are color coded to reflect the conflict status of the plan.

## SEVERE WEATHER AVOIDANCE

Severe weather is a major cause of delay in the NAS today,<sup>15</sup> with en route aircraft consistently avoiding areas of severe weather.<sup>16</sup> In-flight encounters with weather are also cited as a factor in numerous aircraft accidents/incidents.<sup>17</sup> Although pilots are responsible for avoiding severe weather, controllers typically assist pilots with severe weather when requested and workload permits. Currently, controllers have few tools available to assist pilots in severe weather situations, and often rely on Pilot Reports (PIREPs) for severe weather-related information.<sup>18</sup>

This section describes URET enhancements designed to support the controller in severe weather situations, by displaying areas of current and forecast severe weather, and identifying aircraft that are in, or predicted to enter, these areas, as well as providing trial planning and resolution tools to assist in avoiding the areas. Further details on these enhancements may be found in Ref. 19. An overview of a Concept of Use is also presented; additional details are given in Ref. 18.

### Severe Weather Problem Prediction

Severe Weather Problem Prediction is performed using the NWS National Convective Weather Forecast (NCWF) product.<sup>20</sup> This product is updated every five

minutes, and utilizes NEXRAD (NEXt generation weather RADar) radar, lightning, and coverage data. It defines detection “polygons” of current severe weather, a maximum storm “tops” altitude, and a 1-hour extrapolation forecast.

The NCWF is currently used for TFM severe weather reroute applications across multiple sectors and centers,<sup>15,21</sup> using forecasts of 1–2 hours. This product, as used in TFM, has a minimum lateral polygonal area of 520 km<sup>2</sup>; for the smaller scale application at the sector, this minimum has been reduced to 50 km<sup>2</sup>. Accuracy of the current (520 km<sup>2</sup>) NCWF product is addressed in Ref. 20; research for improved products tuned to smaller scale, shorter-term applications is described in Refs. 22 and 23.

Severe weather forecast polygons are defined in URET using the NCWF detection polygon and extrapolation forecast polygon to obtain polygons at 0, 10, 20, 30 and 40 minute projections. Buffers are added to each polygon to account for uncertainty in forecasted weather, based on comparison with actual severe weather data.<sup>24</sup> The size of each buffer is variable and is based on the height of the polygon, its direction of motion, and its projection time. In addition, buffers are added to reflect trajectory conformance bounds (2.5 nm), and pilot-preferred separation estimated from pilot surveys (7 nm).<sup>25</sup> Additional analyses and pilot surveys are underway to validate these buffers.

Assuming each buffered polygon is active and stationary ±5 minutes between its projection time, URET Current Plans are probed for penetrations of active polygons for 0–20 minutes in the future; Trial Plans are probed for an additional 20 minutes.<sup>18</sup>

#### URET Display Enhancements

The display modifications to support the controller in situations of severe weather were designed to integrate closely with the existing URET displays. The Aircraft List remains the primary URET display, with selectable indicators added to notify predicted problems with areas of severe weather. Since both the severe weather and SUA problem indicators denote airspace problems,

they share the same space on the Aircraft List and are color-coded as illustrated in Figure 1 (SUA indicators take precedence over those for severe weather when both are present). As with the existing URET alert indicators, the display of corresponding graphical and textual problem information is available through selection of a severe weather problem indicator. As with other PARR enhancements to URET,<sup>11,12</sup> resolutions to corresponding problems are available through indicator selection, as described below.

The graphical display of severe weather information is illustrated in Figure 2. The controller may choose to display all severe weather polygons, or only polygons currently in conflict with an aircraft. Motion vectors are included with the detection polygons and indicate direction, speed, and tops for the severe weather area. Using the existing URET Graphic Trial Planning capability, the controller may graphically create a Trial Plan around these weather polygons using trackball input. NEXRAD data (matching that available to the Radar Controller) can also be displayed on the GPD. Textual severe weather problem information is available on the URET Plans Display as illustrated in Figure 3.

#### Severe Weather Problem Resolution

The Severe Weather Problem Resolution capability utilizes Dijkstra’s Algorithm<sup>26</sup> to compute the shortest path around the buffered severe weather polygons. This algorithm has been modified to search for two maneuvers, one of which initially turns to the left relative to the path proceeding direct to the maneuver end point, and the other which turns to the right. Each maneuver ends at a fix on the current route of flight, with the fix selected to satisfy a maximum turn angle constraint. The controller is free to examine each maneuver and choose the one that is most operationally acceptable, or create an alternative resolution. Maneuver description text is provided on the URET Plans Display to support coordination with the aircraft.

Figure 2 is an example of an aircraft with a severe weather problem. The problem is with Wx\_783\_10 and Wx\_783\_20 (the 10 and 20 minute forecast


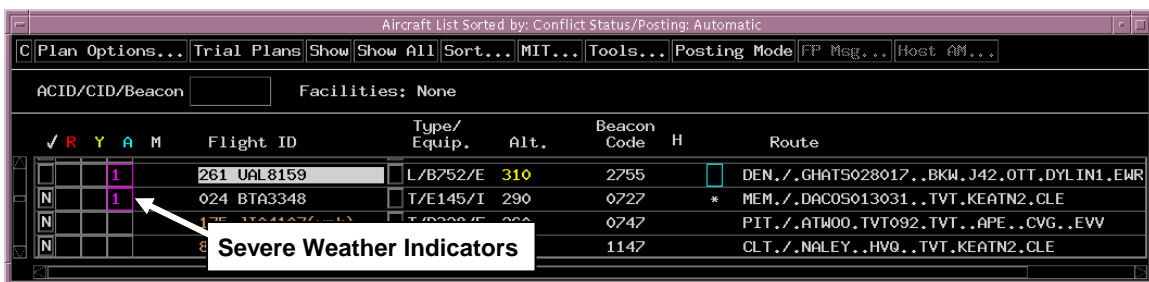


Figure 1. Severe Weather Indicators on the URET Aircraft List

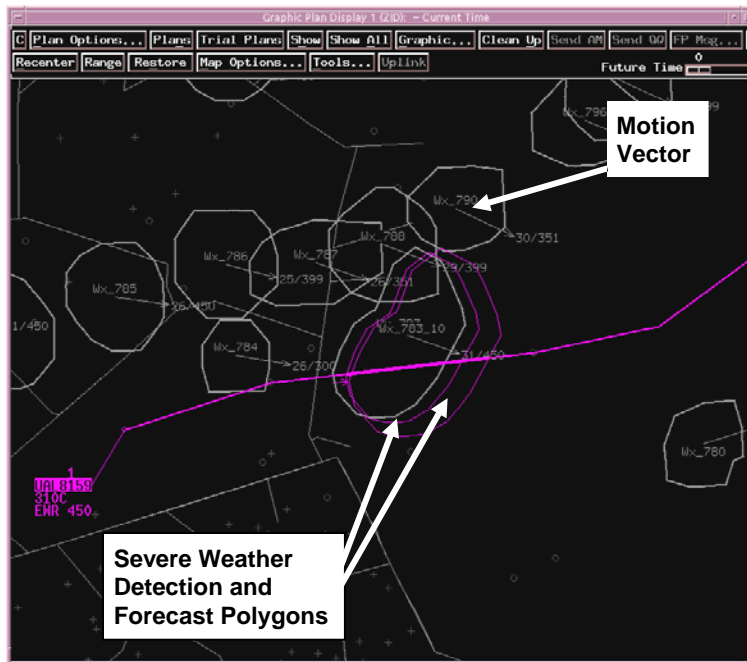

**Figure 2. Severe Weather Problem**

polygons for Wx\_783). Using the Severe Weather Problem Resolution capability, the controller is presented with two lateral resolutions. The first resolution (Figure 4) is a 20 degree turn to the right taking the aircraft around the severe weather polygons. A second resolution to the left (not shown) is also available. Both resolutions avoid all other aircraft for the next 20 minutes and all severe weather areas and SUAs for the next 40 minutes. The controller could then electronically submit one of these resolutions as an amendment to the Host computer using the existing URET capabilities, and verbally coordinate it with the aircraft using the maneuver description text.

Concept of Use

The Concept of Use for the URET Severe Weather capabilities is very similar to that for the URET Aircraft-to-Aircraft and Aircraft-to-SUA conflict probe capabilities. The Aircraft List remains the primary URET display, and the controller scan of this list now includes the severe weather indicators. When severe


weather notification is displayed, the controller can view the problem on the GPD, along with all severe weather polygons and/or NEXRAD data if desired.

Pilot requests regarding severe weather avoidance may be handled as follows:

- If a pilot requests a specific reroute to avoid severe weather (e.g. left 20 degrees for 50 miles then direct to the ABC VOR), the controller uses the URET Graphic Trial Planning capability to determine if the requested reroute is problem-free. If so, the controller issues the reroute and enters the appropriate amendment into the Host computer through URET.
- If the pilot requests support in determining a weather avoidance maneuver (e.g. the pilot asks the controller if it looks better to go right or left of the weather area at 12 o'clock and 50 miles), the controller uses the Graphic Trial Planning or Severe Weather Problem



**Figure 3. Textual Severe Weather Information**

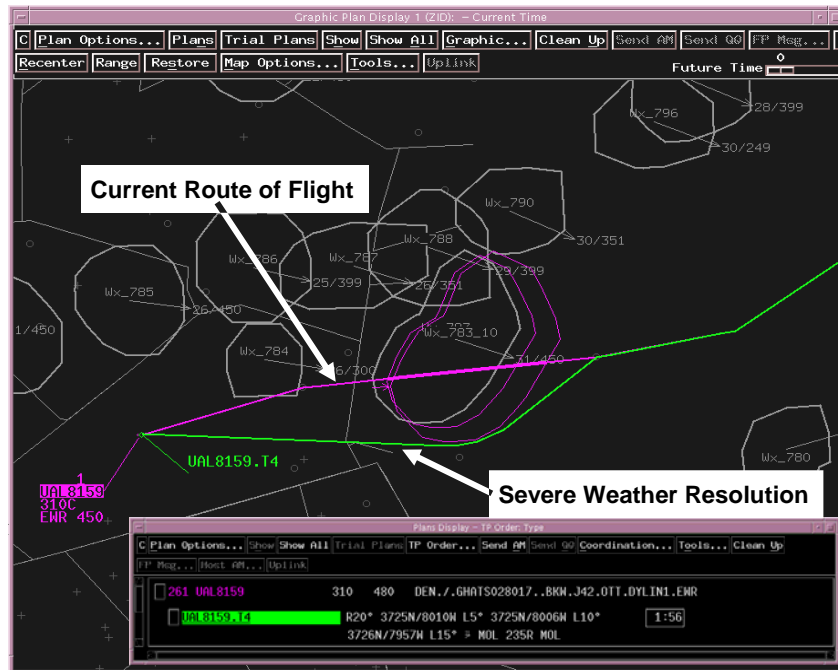

**Figure 4. Severe Weather Resolution**

Resolution capabilities to examine alternative routings. An alternative is selected, the flight plan is amended, and the appropriate maneuver is relayed to the pilot as a reroute (using data link if available<sup>13</sup>), or as heading changes as required. The controller may also use the severe weather display and trial planning capabilities to determine if the aircraft can climb over the severe weather area in a conflict-free manner.

- If the pilot requests additional weather information, such as direction, speed or maximum altitude of the severe weather area, the controller uses the severe weather polygons, motion vector, and NEXRAD displays on the GPD to provide assistance.

When an Aircraft-to-Aircraft or Aircraft-to-SUA problem is displayed on the Aircraft List, the controller uses the URET trial planning capabilities to resolve the predicted problem. If a Trial Plan has a severe weather problem associated with it, the controller may modify this Plan to avoid the severe weather area, particularly if the aircraft has previously requested a deviation for weather.

All of the enhancements for severe weather avoidance are designed with goal of assisting controllers with current tasks by providing more information. These enhancements are not intended to shift the responsibility for severe weather avoidance to

controllers: the Pilot In Command (PIC) remains responsible for avoiding areas of severe weather.

### **EVALUATION OVERVIEW**

Operational evaluations covering severe weather detection, notification and the display of NEXRAD were held in April and July 2002 in the CAASD laboratories with (respectively) five and six former Certified Professional Controllers (CPCs). An additional evaluation focusing on the Severe Weather Problem Resolution capability was held in July 2003 in the CAASD laboratories with these six former CPCs.

Each evaluation included the following:

- An introductory training briefing including a description of the functionality, CHI, Concept of Use and evaluation focus areas.
- A set of facilitated hands-on exercises to demonstrate the functionality and CHI.
- Hands-on practice and evaluation at individual workstations.
- A group discussion using a questionnaire as a guide.
- Operational acceptability of the Concept of Use.
- Operational acceptability of the severe weather problem detection and notification.

- Operational acceptability of the severe weather functionality and CHI to support the Concept of Use.
- Potential benefits for controllers, airspace users and overall traffic flow.

In addition, the operational acceptability of the Severe Weather Problem Resolution capability was discussed during the July 2003 evaluation.

The April and July 2002 evaluation scenario used recorded ZID data from Sept. 7, 2001. The July 2003 evaluation scenario used recorded ZID data from July 9, 2002. Details of the evaluation components and questionnaires are available in Refs. 27 and 28.

### **EVALUATION RESULTS**

Participants indicated that the functionality and CHI for the severe weather enhancements are operationally acceptable and could provide benefits for controllers, airspace users and overall traffic flow. Specifically, they indicated that it is operationally acceptable and useful to provide severe weather notification for Current Plans and Trial Plans. Generally, the participants agreed that the severe weather look-ahead times implemented for Current and Trial Plans (20 and 40 minutes, respectively) are appropriate.

Participants agreed that providing notification for penetration of severe weather that is classified as Level 3 and above is appropriate, and providing polygons at ten minute increments is useful for depicting polygon speed and direction. Participants said that the severe weather polygon and NEXRAD displays are useful and do not provide redundant information. Some participants suggested severe weather notification should not share space with SUA alerts on the Aircraft List. In addition, it was suggested that certain kinds of notification should be suppressed (e.g., an aircraft landing inside an area of severe weather).

Participants indicated that the Severe Weather Problem Resolution capability is operationally acceptable and useful. They suggested that lateral resolutions utilizing Very High Frequency Omnidirectional Range (VOR) navigational aids be made available. By providing routes only between VORs, this type of maneuver can simplify coordination of the clearance between the controller and the pilot by reducing the number of legs required to complete a weather resolution. The participants also indicated that altitude resolutions (to go above the severe weather) would be useful when they are within the aircraft's operational performance envelope.

With regard to resolution maneuver description language, the participants indicated that only the first

part of a complex maneuver description (i.e. turn left 20 degrees) would be verbally issued, with the controller and pilot negotiating the remaining portion of the resolution at the appropriate time. To support this, they indicated that a revised format for maneuver description language using angles, distances, and intercepts would be useful.

The participants cited the following controller benefits from the severe weather enhancements:

- Current Plan severe weather notification allows controllers to anticipate pilot requests for weather-related reroutes. This allows more time to formulate solutions for those requests, and support improved workload management.
- Severe weather displays assist with creating routes that do not penetrate severe weather, decreasing subsequent pilot requests for reroutes due to weather.
- In some cases (e.g., when leading aircraft have requested reroutes for weather), severe weather notification on the Aircraft List allows controllers to deal with severe weather situations in a more timely way rather than waiting until pilot requests are received before taking action.
- Less negotiation with pilots is required to navigate aircraft through severe weather areas.
- The display of NEXRAD data on the D-side allows the Radar Associate Controller to collaborate more effectively with the Radar Controller, as the same severe weather information is available to both.
- Earlier awareness of problems is provided, leading to more timely planning and better anticipation of workload.
- Weather related problems that are missed during Traffic Flow Management (TFM) reroutes can be handled with these capabilities.

Participants cited the following airspace user and traffic flow benefits:

- Severe weather displays in conjunction with Graphic Trial Planning allow controllers to generate more effective and efficient routes for navigating around severe weather.
- Severe weather notification in Trial Plans warns controllers when route changes send aircraft into severe weather, decreasing the

likelihood that aircraft will receive routes that encounter severe weather.

- Severe weather displays used in conjunction with Graphic Trail Planning allow controllers to enter vector maneuvers for severe weather avoidance into the Host, improving the quality of URET trajectories and increasing the likelihood that aircraft will receive the most efficient routes possible in severe weather situations.
- Severe weather displays allow controllers to provide useful weather information when requested by pilots, thus enhancing system safety. (Participants discussed weather related accidents/incidents where severe weather capabilities would have been useful.)
- A more system-wide perspective of severe weather situations is made available to the controller, leading to more strategic decision making. This supports a more orderly and expeditious flow of traffic during periods of severe weather.

The participants noted that the above benefits were based on the assumption that the accuracy of the severe weather detection and prediction was operationally acceptable, with appropriate buffers applied to account for predictive uncertainty. Measurements of this accuracy using metrics similar to those developed for the URET Aircraft-to-Aircraft conflict probe<sup>29</sup> and buffer determination are ongoing.

### **PILOT SURVEY OVERVIEW AND RESULTS**

In order to gain operational feedback into how pilots handle severe weather problems, an online survey consisting of 44 questions was created.<sup>25</sup> The survey was conducted over a one month period during July and August of 2003. The participants consisted of pilots from a major U.S. airline union organization. Pilot experience and background varied; however, all participants had experience with severe weather conditions and the use of airborne weather radar. Participation in the survey was strictly voluntary. The response rate was approximately 1.3%.

A full list of survey questions is provided in Ref. 25. Select questions and an overview of results are provided in the following sections. Additional survey questions related to flying over the top of severe weather, lateral separation from severe weather, and en route convective weather encounter thresholds were also asked. Responses to these questions will be used in the design of new types of resolutions, enhancements to the Concept of Use, and refined operational polygon buffers.

### **Pilot's Use of Severe Weather Information**

The following three questions explored willingness, by participants, to use severe weather information provided by a controller with a tool such as that described in this paper.

<b>Question</b>	<b>Response</b>	
I would feel comfortable with a controller using a product as described above to assist me with routing my aircraft through severe weather.	Strongly Agree	36 %
	Agree	55 %
	No Opinion	2 %
	Disagree	4 %
	Strongly Disagree	3 %
I believe that this type of product would provide information about severe weather that would be useful to my flight.	Strongly Agree	50 %
	Agree	42 %
	No Opinion	2 %
	Disagree	3 %
	Strongly Disagree	3 %
I would be willing to navigate between predicted areas of severe weather with guidance from a controller who is using this tool.	Strongly Agree	18 %
	Agree	59 %
	No Opinion	11 %
	Disagree	8 %
	Strongly Disagree	4 %

The following were some comments made by participants related to willingness to navigating between areas of severe weather with guidance from a controller who is using this tool:

- “Agree, but would also use onboard radar to verify. If I didn't like what I see from onboard radar, I wouldn't accept the clearance.”
- “I would never put my aircraft exclusively in the hands of a controller with or without such weather information. But the more information he can give me, the better able I am to make decisions. What does the new information show him about a proposed route? What PIREPS is he receiving from pilots attempting to use the route? Are they successfully getting through? etc.”
- “Having a controller alone determine our route is not acceptable. It is a team effort with the cockpit crew, ATC and dispatch.”
- “My level of comfort in following controller guidance would be directly proportional to my FAITH in the accuracy of the data provided to the controller. The better the "picture" I have of what the controller is trying to do, the more likely I would be to eagerly follow his guidance.”

- “Provided controllers do not use the information to require an aircraft to penetrate an area that has been identified by airborne weather radar as unsuitable for flight”
- “It would be a long time before I would be comfortable relying on a controller for weather navigation unless I was suddenly faced with airborne radar failure.”
- “As long as I can determine (from analyzing airborne wx radar) that the suggested routing would provide acceptable clearance between my aircraft and the wx as a double check”
- “Using my onboard radar for "fine tuning" the route.”
- “Would like access to similar info in the cockpit to verify controller's guidance.”

ATC Assistance with Severe Weather Problems

As indicated by the responses to the following four questions, most pilots are open to the idea of ATC “warning” or “advising” them of severe weather conditions.

Question	Response	
Approximately how often do you request assistance from air traffic control to avoid severe weather when severe weather is present?	Always	21 %
	Frequently	34 %
	Sometimes	28 %
	Rarely	15 %
	Never	3 %
Would it be useful to you for air traffic control to advise you of severe weather along your route of flight?	Always	76 %
	Frequently	13 %
	Sometimes	10 %
	Rarely	2 %
	Never	0 %
If you request a reroute around a severe weather area on your weather display, would you like to be warned if your requested reroute is projected to penetrate other areas of severe weather identified to air traffic control (that may not be visible on your display)?	Always	92 %
	Frequently	5 %
	Sometimes	3 %
	Rarely	0 %
	Never	0 %

Would it be useful to you for air traffic control to advise you of severe weather along your route of flight?	Always	44 %
	Frequently	29 %
	Sometimes	24 %
	Rarely	3 %
	Never	1 %

Overall, the results of the online survey were favorable and indicate willingness on the part of participants to accept guidance and assistance from controllers using the kind of severe weather capabilities described in this paper.

**TOPICS FOR FUTURE EVALUATION AND ANALYSIS**

Future evaluation and analysis is planned for each component of the URET enhancements to support severe weather avoidance: Severe Weather Problem Prediction, URET display enhancements, and Severe Weather Problem Resolution. Specific topics for each of these components are presented below.

Severe Weather Problem Prediction

Accuracy analysis related to polygon buffering is ongoing.<sup>24</sup> Additional severe weather and aircraft track scenario data, along with operational feedback, will be combined to refine the size and shape of the polygon buffers.

Weather products under development will be investigated to determine their suitability for use in weather resolutions and their applicability to URET severe weather requirements. These include:

- Refinements to the existing NCWF product being researched by the National Center for Atmospheric Research (NCAR),<sup>23</sup> including storm growth and decay information, and reduced delay in product generation.
- MIT Lincoln Labs’ Corridor Integrated Weather System (CIWS).<sup>30</sup>
- Improved products providing more accurate tops information, such as the MIT Lincoln Labs Echo Tops product.<sup>30</sup>
- Additional types of severe weather information, including turbulence<sup>31</sup> and icing<sup>32</sup> products.

URET Display Enhancements

Future work related to URET display enhancements includes the mechanism for severe weather problem notification, and the resolution maneuver description

language presented to the controller. With regard to problem notification, alternatives for the shared space between SUA and Severe Weather problem indicators on the Aircraft List will be examined. Conditions for the suppression of notification (e.g., an aircraft landing inside an area of severe weather) will also be examined.

With regard to resolution maneuver description language, a revised format for maneuver description language will be investigated during future evaluation. This format will include the use of angles, distances, and intercepts.

#### Severe Weather Problem Resolution

Additional evaluations are planned to assess the operational acceptability of the Severe Weather Problem Resolution capability from both a controller's and a pilot's perspective. Specific topics arise from the evaluation results presented above, and include altitude resolutions, and lateral resolutions that use VORs. Additionally, resolutions which avoid the severe weather, but encounter Aircraft-to-Aircraft conflicts will be examined. In these cases, the controller may supplement the lateral reroute (for severe weather avoidance) with an altitude maneuver to avoid the aircraft conflict, or may maneuver the other involved aircraft.

### CONCLUSIONS

The April 2002, July 2002, and July 2003 evaluation results were highly favorable. Specifically, participants indicated that the Concept of Use, functionality, and CHI for the URET Severe Weather enhancements are operationally acceptable and useful. Future evaluations will further refine these capabilities. Additional feedback on Concept of Use, CHI, and resolution acceptability will be sought from pilot groups, dispatchers, and other aviation weather experts.

### REFERENCES

1. Federal Aviation Administration, 2002, *The NAS Operational Evolution V4.0 Web Site*. <http://www.faa.gov/programs/oep>.
2. Burski, M. and J. Celio, 2000, "Restriction Relaxation Experiments Enabled by URET, a Strategic Planning Tool," *3rd USA/Europe Air Traffic Management R&D Seminar*, Napoli, Italy.
3. *Free Flight Performance Metrics – Results to Date*, 2002, FAA, Washington D.C. [http://ffp1.faa.gov/approach/approach\\_ben\\_met.asp](http://ffp1.faa.gov/approach/approach_ben_met.asp)

4. *National Airspace System Concept of Operations and Vision for the Future of Aviation*, 2002, RTCA, Washington, DC.
5. *National Airspace System Concept of Operations – Addendum 1: Free Flight Phase 1 Limited Deployment of Select Capabilities (URET, TMA(SC), pFAST, CPDLC, CDM, SMA)*, 1998, RTCA, Washington, DC.
6. *ATS Concept of Operations for the National Airspace System in 2005*, 1997, FAA. <http://www.nas-architecture.faa.gov/Documents/Opscon.pdf>.
7. *National Airspace System Architecture*, Version 4.0, 1999, FAA. <http://www.nas-architecture.faa.gov/CATSI.cfm>.
8. Nolan, M., 1994, *Fundamentals of Air Traffic Control*, Second Edition, Wadsworth Publishing, Belmont, CA.
9. Celio, J., 1990, *Controller Perspective of AERA 2*, MP 88W00015, Rev. 1, The MITRE Corporation, McLean, VA.: [http://www.mitrecaasd.org/library/tech\\_docs/index.html](http://www.mitrecaasd.org/library/tech_docs/index.html).
10. Wetherby, B., J. Celio, S. Kidman, M. Stanley, 1993, *Full AERA Services Operational Description*, MTR 93W0000061, The MITRE Corporation, McLean, VA. [http://www.mitrecaasd.org/library/tech\\_docs/index.html](http://www.mitrecaasd.org/library/tech_docs/index.html).
11. Kirk, D., W. Heagy, and M. Yablonski, 2001, "Problem Resolution Support for Free Flight Operations" in *IEEE Intelligent Transportation Systems*, Vol. 2, Issue 2, pp. 72 -80.
12. Kirk, D., K. Bowen, W. Heagy, N. Rozen, and K. Viets, 2001, "Problem Analysis, Resolution and Ranking (PARR) Development and Assessment," *4<sup>th</sup> USA/Europe Air Traffic Management R&D Seminar*, Santa Fe, NM.
13. Kirk, D., R. Bolczak, 2003, "Initial Evaluation of URET Enhancements to Support TFM Flow Initiatives, Severe Weather Avoidance and CPDLC," *5<sup>th</sup> USA/Europe Air Traffic Management R&D Seminar*, Budapest, Hungary.
14. Celio, J., K. Bowen, D. Winokur, K. Lindsay, E. Newberger, and D. Sicenavage, 2000, *Free Flight Phase 1 Conflict Probe Operational Description*, MTR 00W00000100, The MITRE Corporation, McLean, VA, [http://www.mitrecaasd.org/library/tech\\_docs/index.html](http://www.mitrecaasd.org/library/tech_docs/index.html).

15. Sherry, J., C. Ball, and S. Zobell, 2001, "Traffic Flow Management (TFM) Weather Rerouting" 4<sup>th</sup> USA/Europe Air Traffic Management R&D Seminar, Santa Fe, NM.
16. Rohda, D., E. Kocab, and M. Pawlak, 2002, "Aircraft Encounters with Thunderstorms in Enroute vs. Terminal Airspace above Memphis, Tennessee" 10<sup>th</sup> Conference on Aviation, Range, and Aerospace Meteorology, Portland, OR. <http://www.ametsoc.org/AMS/>.
17. *Aviation Statistical Reports, 1938-1999*, NTSB, Washington D.C. [http://www.nts.gov/publicnt/A\\_Stat.htm](http://www.nts.gov/publicnt/A_Stat.htm).
18. Celio J., M. Murphy, and K. Viets, 2003, *Concept of Use for Initial Sector Capability Enhancements to Manage Severe Weather and Related Flow Initiatives*, MTR 01W0000047R02, The MITRE Corporation, McLean, VA.
19. Bolczak, R., K. Bowen, J. Celio, M. Murphy, K. Viets, T. Waters, and A. Worden, 2002, *System Level and Computer Human Interface (CHI) Requirements for Advanced Problem Support Capabilities*, MTR 02W0000012, The MITRE Corporation, McLean, VA.
20. Megenhardt, D., C. Mueller, N. Rehak, and G. Cuning, 2000, "Evaluation of the National Convective Weather Forecast Product," 9<sup>th</sup> Conference on Aviation, Range, and Aerospace Meteorology, Orlando, FL. <http://www.ametsoc.org/AMS/>.
21. Sud, V., C. Wanke, C. Ball, and L. Carlson-Rhodes, 2001, "Air Traffic Flow Management – Collaborative Routing Coordination Tools," *AIAA GN&C 2001 Conference*, Montreal, Canada.
22. Evans, J., 2001, "Tactical Weather Decision Support To Complement "Strategic" Traffic Flow Management for Convective Weather," 4<sup>th</sup> USA/Europe Air Traffic Management R&D Seminar, Santa Fe, NM.
23. Megenhardt, D. and C. Mueller, 2002, "Short-Term (0-2 hr) Automated Growth Forecast of Multi-cellular Convective Systems Associated with Large Scale, Daytime Forcing," 10<sup>th</sup> Conference on Aviation, Range, and Aerospace Meteorology, Portland, OR. <http://www.ametsoc.org/AMS/>
24. Arthur, B., 2002, *Initial Approach and Characterization of National Convective Weather Forecast Products Over One-Hour Lookahead Times for Conflict Prediction and Resolution*, F042-M03-005, The MITRE Corporation, McLean, VA.
25. Benson, L., 2003, *Severe Weather Survey Report: Pilot Feedback Regarding Weather Deviation Planning*, (In Preparation), The MITRE Corporation, McLean, VA.
26. Bertsekas, D., 1992, *Data Networks*, Second Edition, Prentice Hall, Belmont, NJ.
27. Worden, A., 2002, *Evaluation Report for Advanced Problem Support Capabilities – April and July 2002 Laboratory Evaluations*, MTR 02W0000060, The MITRE Corporation, McLean, VA.
28. Benson, L., 2003, *Advanced Problem Analysis, Resolution and Ranking -- Severe Weather Capabilities Evaluation Report*, (In Preparation), The MITRE Corporation, McLean, VA.
29. Arthur, W., and M. McLaughlin, 1998, "User Request Evaluation Tool (URET) Interfacility Conflict Probe Assessment." 2<sup>nd</sup> USA/Europe Air Traffic Management R&D Seminar, Orlando, FL.
30. Evans, J., 2001, "The Corridor Integrated Weather System (CIWS)," 10<sup>th</sup> Conference on Aviation, Range, and Aerospace Meteorology, Portland, OR.
31. National Center for Atmospheric Research, 2003, *Turbulence Forecast*, <http://www.rap.ucar.edu/research/turbulence/forecasting.html>.
32. National Center for Atmospheric Research, 2003, *In-Flight Icing Forecast*, <http://www.rap.ucar.edu/iida>.